
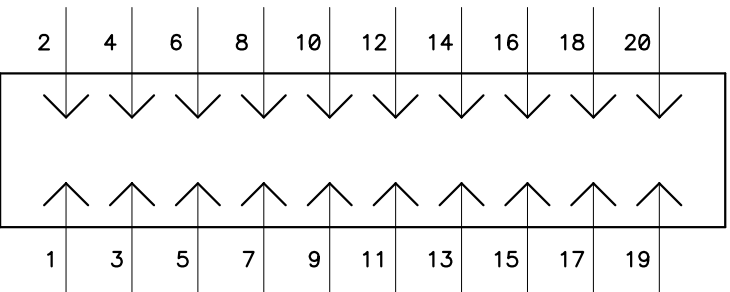


EE301xx/EE151xx

Use Cap across terminal to stop oscillation of electronic loads when using long connection lead to loads.

Connector shown from top view. Pins shown as seen on electronic load.

Note J1 - Pin 2 and the (-) source under test are connected, never have current flowing through this path. All control signals should be connected to J1-pin 2. Only the source under test should be connected to the power test terminal (+) and (-).

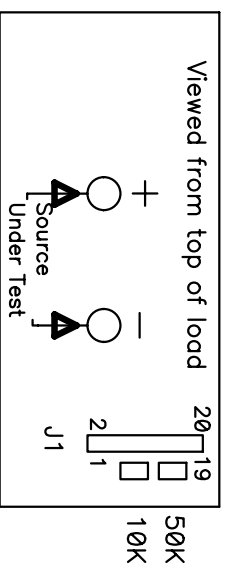

[Http://www.EXEC-ENG.com](http://www.EXEC-ENG.com)

EXECUTIVE ENGINEERING

Title Dual Constant Current Slew Test

Size A

Number EE301/151

Date 6-15-2000

Filename ducl-slew.sch